




Features

- 1.0 Megapixel Sensor
- 25/30fps@720P
- High speed, long distance real-time transmission
- Day/Night (ICR), AWB, AGC, BLC, 2D-DNR
- 3.6mm fixed lens
- Max. IR LEDs length 20m, Smart IR
- DC12V, IP67

Dimensions

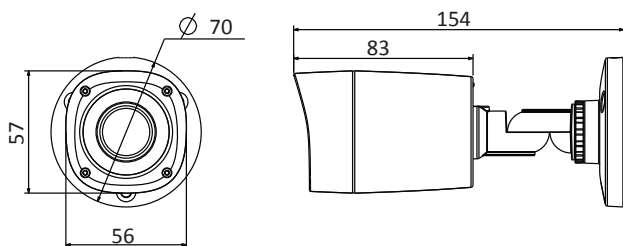

Specifications

| Model | KB - 1001C |
|------------------------|--|
| Camera | |
| Image Sensor | 1/4" 1.0 Megapixel CMOS |
| Effective Pixels | 1280(H)×720(V) |
| Electronic Shutter | 1/50s~1/100,000s |
| Video Frame Rate | 25/30 fps@720P |
| Synchronization | Internal |
| Mini. Illumination | 0.05Lux/F2.0, 0Lux IR on |
| Video Output | 1-channel BNC HDCVI high definition video output |
| Camera Features | |
| Max. IR LEDs Length | 20m, Smart IR |
| Day/Night | Auto(ICR) / Color / B/W |
| Noise Reduction | 2D |
| Lens | |
| Focal Length | 3.6mm |
| Angle of View | H: 58.5° |
| Mount Type | M12 |
| General | |
| Power Supply | DC 12V ±25% |
| Power Consumption | Max 3.5W |
| Working Environment | -30°C ~ +60°C |
| Transmission Distance | Over 800m via 75-3 coaxial cable |
| Ingress Protection | IP67 |
| Dimensions(W×D×H) | 70mm×154mm |
| Weight | 0.2kg |
| Material | Plastic |